



T4 Triphosphor Link Lights



- Ultra-slim lightweight design with metal reflector and diffuser
- Individually switched
- Electronic ballast provides flicker free instant start
- Linkable up to a maximum of 6 fittings
- Fixing brackets supplied

Fittings

| | | |
|-------|-------|-----|
| A6TP | 275mm | 6w |
| A10TP | 424mm | 10w |
| A16TP | 524mm | 16w |
| A20TP | 625mm | 20w |
| A24TP | 705mm | 24w |
| A30TP | 815mm | 30w |

Link Leads

| | |
|----------|--------|
| A250TLL | 250mm |
| A500TLL | 500mm |
| A1000TLL | 1000mm |

Wireable Plugs

- Male and female plugs for non standard lengths

| | |
|-------|------------------|
| AT4PS | 5 pairs of plugs |
|-------|------------------|

Replacement Lamps

| | |
|-------|-----|
| A6TT | 6w |
| A10TT | 10w |
| A16TT | 16w |
| A20TT | 20w |
| A24TT | 24w |
| A30TT | 30w |

Undershelf Kitchen Link Lights



- Linkable slimline undershelf kitchen/pelmet lights
- Steel housing with white polyester powder coated finish
- Suitable for domestic and commercial installations
- Individually switched

Fittings

| | | |
|-------|--------|-----|
| A6KL | 242mm | 6w |
| A8KL | 318mm | 8w |
| A13KL | 548mm | 13w |
| A15KL | 470mm | 15w |
| A16KL | 752mm | 16w |
| A18KL | 625mm | 18w |
| A30KL | 929mm | 30w |
| A36KL | 1237mm | 36w |
| A58KL | 1553mm | 58w |

All fittings supplied complete with lamp

Plugs and Sockets

| | |
|------|------------------|
| AFP | Female plug |
| AMP | Male plug |
| ABPF | Female blank |
| ABPM | Male blank |
| ASC | Straight coupler |

See the Ansell product catalogue for their extensive product ranges

Cabinet Lights



Low Voltage Cabinet Lights

- Surface under cabinet low voltage downlights which can also be recessed by disposing of the surface ring
- 20w maximum
- All metal construction
- Supplied complete with lamp
- Available in white, brass, chrome and satin chrome finish

White

Brass

Chrome

Satin chrome

Surface Tri-lights



Low Voltage Surface Tri- lights

- Surface under cabinet low voltage downlights
- 20w maximum
- Supplied complete with lamp
- Available in satin chrome finish

ALPVT/SC



IP65 Non Corrosive Fittings



- IP65 rating provides protection against water spray and dust penetration
- Durable ABS base
- Clear polycarbonate diffuser
- UV resistant and shockproof
- Supplied with fixing plates for ceiling or suspension hanging

| | |
|--------|---------|
| ADP118 | 1 x 18w |
| ADP136 | 1 x 36w |
| ADP158 | 1 x 58w |
| ADP170 | 1 x 70w |

| | |
|--------|---------|
| ADP218 | 2 x 18w |
| ADP236 | 2 x 36w |
| ADP258 | 2 x 58w |
| ADP270 | 2 x 70w |

Price excludes lamps

Patriot Surface Modular Fittings c/w category 2 louvres



- Chamfered sides and durable plastic end caps
- Particularly well suited to areas of restricted ceiling height

| | |
|-----------|---------|
| APS 136/2 | 1 x 36w |
| APS 158/2 | 1 x 58w |
| APS 170/2 | 1 x 70w |

| | |
|-----------|---------|
| APS 318/2 | 3 x 18w |
|-----------|---------|

| | |
|-----------|---------|
| APS 236/2 | 2 x 36w |
|-----------|---------|

| | |
|-----------|---------|
| APS 258/2 | 2 x 58w |
|-----------|---------|


| | |
|-----------|---------|
| APS 270/2 | 2 x 70w |
|-----------|---------|

| | |
|-----------|---------|
| APS 418/2 | 4 x 18w |
|-----------|---------|

| | |
|-----------|---------|
| APS 436/2 | 4 x 36w |
|-----------|---------|

Price excludes lamps

Moduni Recessed Modular Fittings

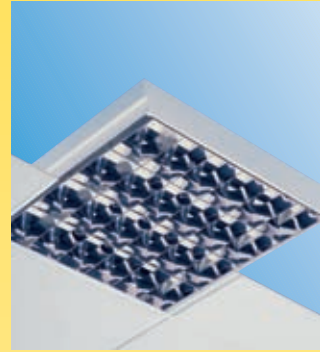

- Universal fully enclosed lay-in fluorescent modular comes with CAT 2 louvre
- Luminaire and louvre suitable for both 15mm and 24mm exposed tee ceiling grid systems
- Louvre is retained within the luminaire body and not the ceiling grid
- Fused terminal block as standard

600mm x 600mm

| | |
|------------|---------|
| ARFU 318/2 | 3 x 18w |
|------------|---------|

| | |
|------------|---------|
| ARFU 418/2 | 4 x 18w |
|------------|---------|

1200mm x 600mm


| | |
|------------|---------|
| ARFU 336/2 | 3 x 36w |
|------------|---------|

| | |
|------------|---------|
| ARFU 436/2 | 4 x 36w |
|------------|---------|

Price excludes lamps

Options available

- /L Low brightness louvre
- /PP Prismatic panel
- /HF High frequency
- /HFD High frequency analogue dimmable
- /HFDD High frequency digital dimmable
- /M3 Emergency

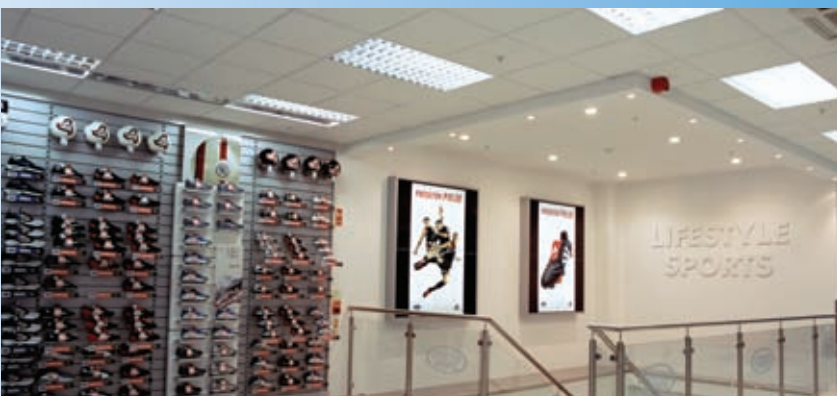



Galaxy PL Downlights

The Ansell Galaxy PL downlighter is a versatile range with an attractive bevelled edge design. All fittings are pre-wired with 2 metres of flex enabling fast installation and has the benefit of detachable/integral control gear for shallow ceiling voids. All accessories are interchangeable and can be added to the fitting after installation.

Options

/HFD High frequency analogue dimming
/HFDD High frequency digital dimming
/M3 Remote emergency

Switch Start

AGPL118/W 1 x 18w
AGPL126/W 1 x 26w
AGPL218/W 2 x 18w
AGPL226/W 2 x 26w

High Frequency

AGPL118/W/HF 1 x 18w
AGPL126/W/HF 1 x 26w
AGPL132/W/HF 1 x 32w
AGPL142/W/HF 1 x 42w
AGPL218/W/HF 2 x 18w
AGPL226/W/HF 2 x 26w
AGPL232/W/HF 2 x 32w
AGPL242/W/HF 2 x 42w

ACCESSORIES

Cross Blade Louvre



Category 2 Cross Blade Louvre

AGPL1/C2 For 18w & 26w
AGPL2/C2 For 32w & 42w

Emergency Drop Legend



Emergency Drop Legend

AGPL/EAR Legend right
AGPL/EAD Legend down
AGPL/EAL Legend left

Trim Bezels with Drop Glass



Complete with drop glass

APGL/DG/W White
APGL/DG/BR Brass
APGL/DG/CH Chrome
APGL/DG/SG Silver grey

Three styles of drop glass available

1. Clear outer ring with frosted centre disc
2. Frosted outer ring & frosted centre disc
3. Frosted glass with open centre

Decorative Trim Bezels



Decorative Twist on Trim Bezels

AGPL/TB/BR Brass
AGPL/TB/CH Chrome
AGPL/TB/SG Silver Grey

IP44 Protective Covers



IP44 Protective Covers

AGPL/OPC Opal Polycarbonate cover
AGPL/CPC Clear Polycarbonate cover
AGPL/FFG Frosted flush glass cover

Decorative Anti-glare ring



Decorative Anti-glare rings

AGPL/AGR/FR Frosted
AGPL/AGR/BL Blue



Mains Voltage Track and Accessories



- Low profile 240v 15A mains track system
- Track supplied complete with live and dead ends
- Suitable for domestic and commercial applications
- Full range of accessories

1 metre track

- A10MVT/W white
- A10MVT/B black
- A10MVT/BR satin brass
- A10MVT/SS satin silver

2 metre track

- A20MVT/W white
- A20MVT/B black
- A20MVT/BR satin brass
- A20MVT/SS satin silver

Niso



12v 50w Integral transformer

- ANLVT/W white
- ANLVT/B black
- ANLVT/BR brass
- ANLVT/CH chrome
- ANLVT/SS satin silver
- 500 mm drop rod models also available
- Lamps not included

Faro



50w 240v GU10

- AFGUT/W white
- AFGUT/B black
- AFGUT/BR brass
- AFGUT/CH chrome
- AFGUT/SS satin silver
- Lamps not included

Beta



50w 240v GU10

- ABGUT/W white
- ABGUT/B black
- ABGUT/BR brass
- ABGUT/CH chrome
- ABGUT/SS satin silver
- Lamps not included

Oblo



12v 50w Integral transformer

- AOLVT/SS satin silver
- Supplied with frosted green & blue glasses
- Lamps not included
- Non dimmable**

Prima



75w par 30 240v

- APPAR/W white
- APPAR/B black
- APPAR/SS satin silver
- Lamps not included

Milano



50w 240v GU10

- AMGUT/SS satin silver
- Lamps not included



Orion IP65 Slim HQI



Orion IP65 slim HQI die-cast floodlight

- Attractive ultra-slim IP65 die-cast body
- Style provides suitability for both internal and external applications
- Hinged front cover
- Tempered safety glass
- Available in black, white or silver grey
- Photo-cell options

A70MHL 70w HQI

A150MHL 150w HQI

Both fittings sold complete with lamp

Prices quoted are for black finish

Orion IP65



Orion IP65 die-cast floodlight

- Asymmetric reflector
- Tempered safety glass
- Available in black, white or silver grey

A150SONT 150w SON

A250SONT 250w SON

A400SONT 400w SON

A250MHL 250w HQI

A400MHL 400w HQI

A250M 250w MBF

All fittings supplied complete with lamp

Prices quoted are for black finish

Orion IP66 Moulded PBT



Orion IP66 moulded PBT floodlight

- IP66 body manufactured in high corrosion resistant thermoplastic (PBT)
- Glass secured with clips

A70MHLP 70w HQI

A150MHLP 150w HQI

A150SONTP 150w SON

A250SONTP 250w SON

A400SONTP 400w SON

A250MHLP 250w HQI

A400MHLP 400w HQI

All fittings supplied complete with lamp

Orion IP65 Projectors



Orion IP65 die-cast projectors

- IP65 Die-cast aluminium body
- Hinged lamp compartment for easy lamp replacement
- Supplied with IP65 remote control gear and lamp
- Ideal for sports arena or illuminating large areas

A100SONT 100w SON

A1000MHL 1000w HQI

A2000MHL 2000w HQI

2000w HQI flood complete with 415v gear and lamp

Orion IP65 Ecco



Orion IP65 ecco polycarbonate floodlight

- Economical general purpose discharge floodlight
- Polycarbonate front cover for SON & MBF versions and glass cover for HQI

AF70SP 70w SON

AF80MP 80w MBF

AF125MP 125w MBF

AF70MHLP 70w HQI

AF150MHLP 150w HQI

Accessories



Floodlight accessories

A comprehensive range of bespoke accessories are available for all Ansell floodlights including wire cages and guards, photocell options and much more.

Please ask for details and a copy of Ansell's full colour catalogue.

Drum Fittings 2D Low Energy



16w Mini Pizza IP65
C/W Lamp

White / Prismatic
 White / Opal
 Black / Prismatic
 Black / Opal

28w Pizza IP65
C/W Lamp

White / Prismatic
 White / Opal
 Black / Prismatic
 Black / Opal

Emergency versions available on request.

Utility Drum Fittings



100W Polycarbonate

White / Opal
 White / Prismatic
 Black / Opal
 Black / Prismatic

Anti Vandal Bulkheads



Polycarbonate 100w

Black / Prismatic

Polycarbonate
 1 x 9w PL lamp
 Black / Prismatic

Polycarbonate
 + Photocell
 2 x 9w PL lamp
 Black / Prismatic

Square Fittings 2D Low Energy



16w Apollo Mini Sq IP65
C/W Lamp

White / Prismatic
 White / Opal
 Black / Prismatic
 Black / Opal

28w Apollo Sq IP65
C/W Lamp

White / Prismatic
 White / Opal
 Black / Prismatic
 Black / Opal

Vandal Resistant Garden Lighting



Half Lantern

Classic design Half Lantern in Polycarbonate which is weather and vandal resistant

Standard 60x fitting
 PIR 60w fitting
 Available in black and white

PIR Coach Lantern



- Shatterproof polycarbonate
- IP44
- 110 degree PIR
- 6m range

PIR lantern Black
 PIR lantern White
 Slave lantern Black
 Slave lantern White

3 YEAR GUARANTEE



Single Lightpack



All fittings C/W standard white tube

| | | |
|--------|-----|------|
| LPF18 | 2ft | 18w |
| LPF30 | 3ft | 30w |
| LPF36 | 4ft | 36w |
| LPF58 | 5ft | 58w |
| LPF70 | 6ft | 70w |
| LPF100 | 8ft | 100w |

Single Lightpack Prismatic Diffusers



| | |
|--------|-----|
| LPC18 | 2ft |
| LPC30 | 3ft |
| LPC36 | 4ft |
| LPC58 | 5ft |
| LPC70 | 6ft |
| LPC100 | 8ft |

Twin Lightpack Prismatic Diffusers



| | |
|---------|-----|
| LPC218 | 2ft |
| LPC236 | 4ft |
| LPC258 | 5ft |
| LPC270 | 6ft |
| LPC2100 | 8ft |

Twin Lightpack



All fittings C/W standard white tube

| | | |
|---------|-----|--------|
| LPH218 | 2ft | 2x18w |
| LPH236 | 4ft | 2x36w |
| LPH258 | 5ft | 2x58w |
| LPH270 | 6ft | 2x70w |
| LPH2100 | 8ft | 2x100w |

Miniature Fittings C/W Lamp



| | | |
|-----------------------------------|-----|-----|
| Unswitched | | |
| MLP8 | 12" | 8w |
| MLP13 | 21" | 13w |
| Pull Cord | | |
| MLPS8 | 12" | 8w |
| MLPS13 | 21" | 13w |
| Rocker Switch and Diffuser | | |
| MDPR8 | 12" | 8w |
| MDPR13 | 21" | 13w |
| Prismatic Diffuser | | |
| MPC8 | 12" | |
| MPC13 | 21" | |

Not Just Battons

Fitzgerald Lighting manufacture and supply much more than just Fluorescent fittings.

Ask for their full lighting specifier guide



OUTDOOR

EXPLOSION PROOF



LOW BAY

FLOOD LIGHTING



HIGH BAY

AMENITY

3 Year Guarantee on all fluorescent fittings

Eden



EDEN is a robust polycarbonate emergency bulkhead with screw fixing diffuser

ED8/3E

- 8w 3 hour non-maintained
- IP65
- Economy bulkhead

ED8/3EM

- 8w 3 hour maintained
- IP65

Mini-D



Mini-D is a circular IP65 polycarbonate luminaire in mains and emergency options.

MIP28

28w Mains

MIP28/3M

28w 3hr Maintained

Phantom



Phantom is a non-maintained emergency floodlight ideal for industrial applications. The Phantom features a robust steel body and five year maintenance free lead acid batteries.

PTS21/3

2 x 21w 3hr

PTSH20/3

2 x 20w 3hr Halogen

PTSH55/1

2 x 55w 1hr Halogen

Herald



Herald is a low profile white metal exit sign with a threshold downlight panel that illuminates the area directly below the sign. The Herald is supplied complete with a Euro pictogram legend panel.

HLD8/3E/WH

8w 3hr Non maintained

HLD8/3EM/WH

8w 3hr Maintained

Anglolite



Anglolite is an attractive, fully recessed luminaire available in a range of colour finishes. The Anglolite's hinged, removable gear tray and front plate facilitate easy fixing and maintenance.

AG8/3NM

8w 3hr Non maintained
white

AG8/3M

8w 3hr maintained
white

Also available in Brass and Chrome finishes
price available on request.

Talisman



Talisman is a stylish chain suspended edge-lit emergency exit sign.

TML8/3NM

8w 3hr Non maintained
c/w legend

TML8/3M

8w 3hr Maintained
c/w legend

All SPEL's products are covered by a 3 year warranty, excluding lamps and batteries, which carry their original manufacturers 12 month guarantee, and many of their products carry the BSI Kitemark.



Wall Lantern



- Bevelled edge glass for decorative effect
- 60w ES Max ■ 6 sided
- Black

GGLMWU640B Up Lantern
GGLMWD640B Down Lantern

Hanging Lantern



- Die cast construction
- 60w ES Max ■ Black
- IP43
- Traditional style

GGLMH640B


Modern Wall Lantern



- Weatherproof
- Vandal proof construction
- 60w ES Max ■ Black

GGLMW540B

Stainless Steel Wall Post

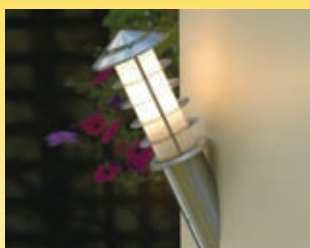

- Suitable to use low energy lamps
- 340mm (h) x 140mm (d)
- Contemporary design

GGLMWRS

Stainless Steel Lantern



- Classic square design
- 60w ES Max

GGLMSCS


Exclusive weatherproof switches & sockets



- IP55 ■ Smooth curved design
- Switches can be operated through membrane, thereby maintaining full IP rating

| | |
|---------|---------------|
| GWP1612 | 1g 2w |
| GWP1622 | 2g 2w |
| GWP3050 | 1g Unswitched |
| GWP3060 | 2g Unswitched |
| GWP3010 | 1g Switched |
| GWP3020 | 2g Switched |


Budget Lantern

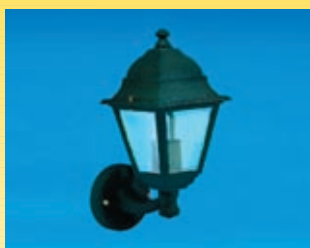

- Die cast ■ 4 sided
- IP43 ■ Black

GLAN4SB

Post Top Lantern

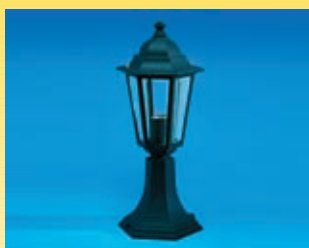

- Traditional lantern style
- 6 sided ■ Black die cast

GLAN6SPTB

40w Bricklights



The louvered option is very tough and provides a degree of vandal resistance and can be used to provide good low level lighting when mounted near paths and driveways.

- IP44 ■ Die cast aluminium

GBL40LB Louvered
GBL40PB Plain

Push to Break Switches



- Surface mounting
- Push to break
- Black or White
- 2 Amp

Black / White

Brass BC Lampholder



- 1/2" entry
- Shade ring

Un-Switched

A70 Brass

Switched

A38

Hook Plates



- Brass
- 2 Hole fixing

400BRA

Brass Reducer



- 1/2" x 10mm

511M Brass

Brass BC Batten Holder



- 3 hole fixing
- Batten type
- Shade ring

A82

Brass Back Plate



- 3 Hole fixing
- 10mm

502

In Line Switches



- 2 Amp
- Single pole
- Brass / Black / White / Brown

701

Press Switch



- 1 Amp
- White

703

Brass Flush Push to Break Switches



- Flush mounting
- Brass plate
- 1 Amp
- Back box

140wb



Ceiling Globe Fitting



- Polycarbonate construction
- Opal glass diffuser
- BC GLS Lamp

60W
100W

Dimming Pull Switch



- Polycarbonate
- Pull action for on/off
- Prolonged pull for dimming
- 250w Incandescent load
- 175w Transformer load
- Not suitable for fluorescent lamps
- Includes white and chrome effect covers
- IP20 rated

DIM250

Halogen Floodlights



240v
150W
500W
1000

GU10/LV Ceiling Converters



- Pressed metal construction
- Converts traditional mains downlight and eyeball dimensions to modern GU10 or low voltage lighting
- Supplied with ceramic GU10 & LV lampholders
- IP20 rated

CR80BS Polished brass effect
CR80CR Polished chrome effect
CR80SN Brushed nickel effect
CR80WH White



Nema Socket Electronic Photocell Kit

- C/w wall fixing bracket
- Thermoplastic moulding
- 1500va or 5amp inductive load
- Switching at 70 lux
- IP44

Low Voltage Rope 5 Light Kit



- 5 light multi-directional light fixtures
- Matching 105va transformer with fitted 3 pin plug
- 10 metres of wire rope allowing up to 5 metre run
- Complete with all necessary fixings and accessories
- Requires 5 x 20w halogen lamps (supplied)
- Matt silver finish

Par 38 Garden Lighting



Ground Spike

Single
Twin

Surface Spot

Single
Twin

Plug in Ceiling Rose



Available unwired and pre-wired

- 4 terminals
- 6 Amp rated
- Pre-wired version comes with 2m of .75 4 core flex
- IP20

Unwired
Pre-wired
Lamps not included

Low Energy



Pendant

To be used with 4 pin plug in lamps only 13w and 18w versions

13w Pendant
18w Pendant
Lamps not included



The Best in Display and Architectural Lighting

Since 1981 Illuma Lighting has been designing and manufacturing lighting fittings. All along we have been listening and responding to our customer's requirements and your needs are probably much the same as theirs...

- a wide range of products to choose from so you can achieve the lighting results you want
- quality products you can rely on
- products that are quick and easy to install – time is money after all
- prompt delivery so your project can be completed on time
- a reliable supplier who can provide technical advice and back-up when you need it
- and last but not least, value for money

Illuma's slogan is simple...

'Customer Satisfaction Guaranteed' and promises you all of these.

We are committed to fulfilling that promise and to giving you the kind of service you'll be happy to tell others about.



Concepta Spotlights for CDM-TC Lamps



Nidd Vale Saab – Harrogate



Mamas & Papas – Reading



Arc Downlights for Brite Spot Lamps

The full range of Illuma products now available please ask for details.



Columbus



The Columbus bulkhead fittings range is the round design that compliments the Mini-Max square product.

- HF Electronic or HPF switch start
- 3 hour maintained and auto test emergency versions available
- Factory fitted or self fit photocell kit available
- Semi recessing kit available
- Security screws available
- Black or white base
- IP65

FH20328R 28w 2D white/opal

Mini-Max



The Mini-Max range of energy efficient bulkhead fittings are manufactured with a polycarbonate base and diffuser.

Together with the proven feature of an extruded bi-seal hermetic gasket, the Mini-Max is at the forefront of vandal resistant IP65 technology.

Designed in partnership with the end user, Mini-Max, like many other Fern Howard fittings use the unique Time in a Box installation system. In addition a hinged gear tray and flying lead will also show significant savings of installation time and costs.

FH20-325-16 16w white/opal
 FH20-325-28 28w white/opal
 FH20-325-38 38w white/opal

Moonlight



The Moonlight security light offers exceptional value and outstanding peace of mind where safety and protection are the application requirements.

- Black base with opal diffuser
- Fitted photocell for dusk to dawn lighting
- IP34
- Non photocell option available
- Complete with 16w 2D lamp

FH790-B-OP 16w2D + Photocell
 FH795-B-OP 16w2D

Ice Breaker



Design features include an ultra-slim profile and snap fit diffuser, enabling Ice Breaker to be used for any IP44 application.

- Lowest profile ever only 75mm
- Snap fit diffuser
- All polycarbonate
- Complete with 28w2D lamp
- Rear besa cable entry
- IP44

FH20328R 28w 2D white/opal

Galileo



Galileo leads the Fern Howard range of architectural ceiling and wall mounted energy saving fittings.

- Shallow profile
- Wall or ceiling mounted
- Opal polycarbonate diffuser
- High power factor
- IP20
- Time in a Box

FH20-325-16 16w white/opal
 FH20-325-28 28w white/opal
 FH20-325-38 38w white/opal

Milan



The Fern Howard Milan range gives the specifier a unique opportunity to match architectural design with IP65 performance. The prismatic glass diffuser is surrounded by a polycarbonate bezel with a twist locking seal. The Milan is a flexible energy efficient CFL fitting for wall and ceiling mounting, also available with a translucent bases to give stunning back lighting effects.


Milan Coloured





The Contractor Range of Light Fittings from Fern Howard

- Vandal resistant
- Complete with 16w or 28w 2D lamp
- Black or white base
- 3 hour maintained emergency version (EM)
- Clear prismatic or opal polycarbonate diffuser
- Hinged gear tray for ease of installation
- Rear Besa cable entry
- IP65

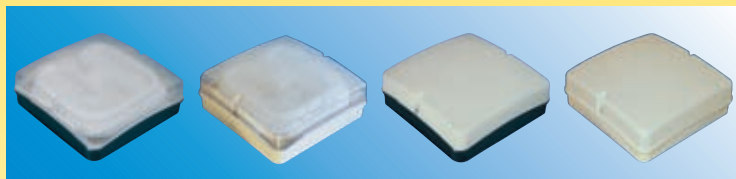

Trojan Round

| | |
|--------------|--------------------|
| FH26016-B-CL | 2D 16w Black/Clear |
| FH26016-W-CL | 2D 16w White/Clear |
| FH26016-B-OP | 2D 16w Black/Opal |
| FH26016-W-OP | 2D 16w White/Opal |

| | |
|--------------|--------------------|
| FH26028-B-CL | 2D 28w Black/Clear |
| FH26028-W-CL | 2D 28w White/Clear |
| FH26028-B-OP | 2D 28w Black/Opal |
| FH26028-W-OP | 2D 28w White/Opal |





| | |
|--------------|-----------------------|
| FH26028-W-CL | 2D 28w White/Clear EM |
| FH26028-W-OP | 2D 28w White/Opal EM |

Trojan Square

| | |
|--------------|--------------------|
| FH27016-B-CL | 2D 16w Black/Clear |
| FH27016-W-CL | 2D 16w White/Clear |
| FH27016-B-OP | 2D 16w Black/Opal |
| FH27016-W-OP | 2D 16w White/Opal |

| | |
|--------------|--------------------|
| FH27028-B-CL | 2D 28w Black/Clear |
| FH27028-W-CL | 2D 28w White/Clear |
| FH27028-B-OP | 2D 28w Black/Opal |
| FH27028-W-OP | 2D 28w White/Opal |


| | |
|--------------|-----------------------|
| FH27028-B-CL | 2D 28w Black/Clear EM |
| FH27028-W-CL | 2D 28w White/Clear EM |



Energy efficient lighting - Time in a box - Full catalogue on request



Mirror Lights

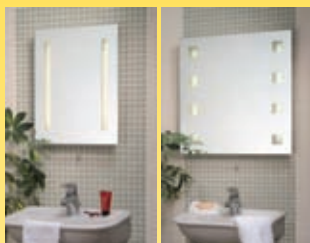

LED Group's stunning range of Mirror Lights. The range includes 4 different versions

IP44 Mirrors c/w striplights

R6060T5 – 600mm x 600mm complete with two strip lights

R5039T8 – 500mm x 390mm complete with two strip lights

IP44 Mirrors c/w square lights

R6060T58S – 600mm x 600mm complete with eight square lights

R5039T86S – 500mm x 390mm complete with six square lights

Heated Towel Rails



- Dries & warms towels
- Built-in power indicator light
- On/off switch ideal for summer
- Sealed switch to protect against splashes
- For zone 3 if wired to fused 3amp spur outlet

RTR95-03 'S' Towel Rail

Mirror Cabinet Light



Mirror cabinet light c/w squares

- IP44 – suitable for use in bathroom zone 2 & 3
- Dimensions – 600mm x 645mm
- c/w 8 frosted squares
- Cool running, glass cool to the touch
- Fog free – will not mist up in a steamy bathroom
- c/w pull cord
- Door opens to the right or left
- 2 glass shelves included
- 2 year guarantee

L.E.D. Pre-wired Kit



- IP68 10 Fitting kit
- Ideal for ceiling / deck lighting
- 0.12w super bright l.e.d's
- Each kit contains 10 miniature fittings, each with 3 l.e.d's in either blue or white, IP44 driver, connector cables, lead & plug
- Easy to install

R3LED10-01 White
R3LED10-07 Blue

Wall Mounted Hair Dryer



IP44 1.5kw wall mounted hair dryer

- Automatic on & off function – dryer turns off when the nozzle is replaced
- Automatic switch off after 18 minutes
- Adjustable temperature setting
- 1,500W heat
- Suitable for use in bathroom zone 3

LHD1500-01 White

2D Golf Fittings



- IP65 – water proof
- Comes with either 2 or 4 pin lamp
- Impact resistant body & diffuser
- Ideal for corridors & stairwells
- Emergency and high frequency versions available
- 2 year guarantee

16W with 2 pin lamp

R162D+L-01 White
R162D+L-02 Brass
R162D+L-03 Chrome

28W with 4 pin lamp

R282D+L-01 White
R282D+L-02 Brass
R282D+L-03 Chrome



Pressed Metal Downlights



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome; black nickel

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp

Pressed Metal Eyeball



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome; black nickel

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp

Pressed Metal Centre Tilt



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome; black nickel

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp

Cast Metal Downlights



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome; black nickel

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp

Cast Metal Adjustable Downlights



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Cast Metal Centre Tilt



50mm low voltage

Available in the following finishes: brass effect; chrome; white; brushed brass effect, brushed chrome; black nickel

Kit Price

- 1 x Fitting
- 1 x 60va Transformer
- 1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp



Shower Lights IP54



50mm low voltage

Available in the following finishes: brass effect; chrome effect; white; stainless; black nickel; satin brass; pearl nickel

Kit Price

1 x Fitting
1 x 60va Transformer
1 x 50w Lamp

Mains halogen 240v GU10

Available in finishes as above.
Complete with 50w lamp

GU10 Spotlights



- Blue or white glass
- Satin nickel finish
- Complete with 50w GU10 lamp

Single Spot

Triple Spot

GU10 Wave Bar Quad Spotlights



- Wave Bar ■ Blue or white glass
- Satin nickel finish
- Complete with 50w GU10 lamp

GU10 Flat Plate Ceiling Spot



- Compact & robust
- No transformer required
- Available in brass, chrome, white, black nickel, pearl nickel, brush chrome and brass
- Complete with 50w GU10 lamp

Transformer Electronic Dimmable



- 5 year guarantee
- Compact design for ease of installation


GTRE65 65va
GTRE105 105va
GTRE150 150va
GTRE200 200va

Flush light



- 60w ES ■ Decorative opal glass
- Available in brass, white and chrome
- 310mm Diameter
- Suitable for bathrooms

20A Small Junction Box

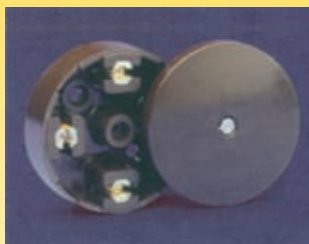

- 59mm 4 terminal junction box
- designed to fit through a cut out

60w Tungsten Shaver Light



- Single voltage 230v output
- Complete with lamp

BULK RATES AVAILABLE

Savoy 3 Light Flush Fitting



- 3 x E14 60w
- Satin steel or satin brass finish
- Matching single and twin wall lights also available

5579

Court Semi Flush Fitting



- 150w tungsten halogen lamp included
- Chrome or brass finish
- Matching wall light available

S500


Cassio Table Lamp



- 12v 50w halogen lamp included
- Brushed steel or antique brass finish
- Built in dimmer

5663

Spa IP44 Bathroom Lights

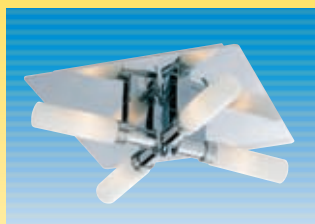

- 4 x 240v/40w G9 lamps included
- Chrome with opal glass
- IP44 rated
- Matching wall lights also available

5755

Aqua Wall Light



- 1 x E14 60w
- Chrome with opal glass
- IP20 rated
- Zone 3

2255

Rondo Bathroom Light



- Flush fitting ■ Brushed steel finish
- Large and small versions available
- IP54 rated

2740BS (ø310mm) 1 x E27 60w
2745BS (ø180mm) 1 x 240v/40w G9
(included)

Ceramic Uplight



- 1 x E27 100w
- H 130mm, D 120mm, W 250mm
- Unglazed

C300

Ceramic Uplight WITH GLASS



- 1 x E27 100w
- H 100mm, D 140mm, W 320mm
- Unglazed

C317

Ceramic Uplight



- 1 x E27 100w
- H 100mm, D 180mm, W 370mm
- Unglazed

C305

The above is just a small selection of the lighting available from Firstlight, please ask for a catalogue.



Cast Fire Rated Downlights



F-Mark Thermal tested and approved for mounting on normally flammable surfaces to comply with F-marking requirements with 35w lamps. Also suitable for continuous use with 50w lamps.

Integrated intumescent material Incorporated in the downlight completely seals it in the event of a fire.

Maintains the ceiling fire barrier integrity In compliance with the building regulations approved document B, Fire Safety.

Maintains the ceiling acoustic properties In compliance with the building regulations approved document E, Resistance to the passage of sound.

Simple and versatile installation no different to a standard downlight, suitable for installation in ceiling materials up to 35mm thick.

Lamp Compatibility Designed for use with both Aluminium and Dichroic reflector lamps.

Fully Approved and Certified Complies with all relevant Safety, Acoustic and Fire regulations.

Common Features

- Integrated intumescent
- Material completely seals the downlight and cut out in the event of a fire
- Suitable for 30 and 60 minute fire rated ceilings
- Tested to BS476 Part 21
- 2 year guarantee
- 50w max
- Aluminium die-cast with lock ring
- Low and mains voltage

Fixed



- 75mm cut out
- Recess depth 139mm
- Lip depth 7mm

AU-DLL991*
12v MR16

AU-DLM981*
240v GU10

Adjustable



- 30 degree horizontal adjustment
- 85mm cut out
- Recess depth 144mm
- Lip depth 7mm

AU-DLL992*
12v MR16

AU-DLM982*
240v GU10

IP65



- IP65 jet proof showerlight
- 72mm cut out
- Recess depth 155mm
- Lip depth 10mm

AU-DLL993*
12v MR16

AU-DLM983*
240v GU10

*Add suffix W, PB, PC, SN, or SS to product number to denote finish required. Price excludes lamp and transformer where required.



Satin Nickel



Polished Brass



Polished Chrome



Satin Silver



White

“Plug-In” Transfomer



IEE Wiring regulation 713-04-02 states that 'all current using equipment (this includes transformers), must be disconnected when conducting an insulation resistance test' With the PD60, there is no need for re-wiring after the test - **this reduces testing and commissioning by up to 40%.**

- Registered Design - Patent Pending
- 60Va fully dimmable electronic transformer
- 5 year guarantee
- Pre wired with 30cm LV cable and MR16 lampholder. No junction box required.

AU-PD60

Time Lag Switch



- For simple control of lighting in corridors, entrance halls, washrooms etc.
- Pressing the button switches the lights on. The lights switch off after the adjustable time lag has elapsed, thus saving energy
- Adjustable time lag 1 – 10 minutes
- Maximum load 6 Amps (1500va) of any type of load, including inductive loads

AU-TLS100

Dimming without de-rating

Typically when controlling tungsten halogen lamps it is necessary to de-rate dimmers by up to 50%. Aurora dimmers incorporate a ceramic HRC fuse, thereby allowing the control of dimmable electronic transformers, toroidal transformers and tungsten halogen lamps **without** de-rating.

Rotary Control (push on push off)



- Module case ultrasonically sealed to reduce dimmer buzzing
- For use with resistive and inductive loads

40 – 250va

- AU-DSP251** 1 Gang 2 way
- AU-DSP252** 2 Gang 2 way
- AU-DSP253** 3 Gang 2 way
- AU-DSP254** 4 Gang 2 way

60 – 400va

- AU-DSP401** 1 Gang 2 way
- AU-DSP402** 2 Gang 2 way

High Power (push on push off)



- Integrated neon indicator to locate switch in darkness
- Integrated over-temperature protection fuse

75 – 650va

- AU-DSP651** 1 Gang 2 way

75 – 800va

- AU-DSP801** 1 Gang 2 way



Fixed Die Cast MR16 with lock ring lamp retainer



Low Voltage Fixed Cast Downlight

- Cut-out 70mm
- Overall 80mm
- Recess depth 110mm
- No spring clips

- White
- Matt white
- Polished brass
- Polished chrome
- Antique brass
- Brushed brass
- Satin nickel
- Satin silver
- Gun metal
- Pearl nickel
- Matt black



Antique Brass



Brushed Brass



Gun Metal



Matt White



Polished Brass



Polished Chrome



Pearl Nickel



Satin Nickel



White



Matt Black



Satin Silver

Adjustable Die Cast MR16 with lock ring lamp retainer



Low Voltage Fixed Cast Downlight

- Cut-out 80mm
- Overall 95mm
- Recess depth 110mm
- Horizontal adjustment 30 degree
- No spring clips

- White
- Matt white
- Polished brass
- Polished chrome
- Antique brass
- Brushed brass
- Satin nickel
- Satin silver
- Gun metal
- Pearl nickel
- Matt black

Lockring Downlight Accessories



Honeycomb




Floating glass clear/frosted



Round baffle adaptor



Floating glass frosted/clear



Slotted Accessory



Coloured glass lock ring



GZ/GU10 Block & Bracket

Fits all low voltage fittings no need to carry two ranges just change lamp holders